

SR-38

ROCKER SWITCH SR-38 SERIES



SR-38A



SR-38B



SR-38C

ROCKER SWITCH

SPECIFICATIONS

	10(3)A	250VAC	T125/55	5E4
	16(4)A	250VAC	T125/55	
	10(8)A	250VAC	T125/55	
<p>E199326</p>	10.1A	250VAC	T125	
	16A	125VAC		
<p>RECOGNIZED COMPONENT</p> <p>Conforms to UL STD.61058-1. Certified To CSA STD.C22.2 No. 61058-1.</p>	16(4)A	250VAC	T125/55	
	10(3)A	250VAC	T125/55	5E4
	16A GP	125VAC	T125/55	
	10.1A GP	250VAC	T125/55	

FEATURES

- Usage: General purpose, Heater, HVAC, Home Appliance, Massage Device
用途：通用·電暖爐·空調設備·家電·按摩器
- Slim and miniature design with waterproof cap optional
超薄微型設計·防水帽可選
- Single Pole 單極
- Multi-function /Neutral lamp/Indicator function
切合不同使用功能/指示燈功能
- Temperature Rating: -10°C~125°C
額定溫度：-10°C~125°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0

ROTARY SWITCH

PUSH SWITCH

MICRO SWITCH

ORDER INFORMATION

A	L	T	BK	BK	1	0	0	0	00	INTERNAL USE ONLY
FUNCTION	CURRENT	TERMINAL TYPE	BASE COLOR	BUTTON COLOR	BUTTON TYPE	PRINTING	COLOR OF PRINTING	LAMP VOLTAGE	SMALL LEN COLOR	
A ON-OFF	L 16(4)A 250VAC	T	BK Black	BK Black	2	0 NONE	0 None	0 None	00 None	
B ON-ON	10(3)A 250VAC 5E4	T1	WT White	WT White	3	1	1 White	1 12V	RE Red	
C ON-OFF-ON	16A 125VAC	T1	GE Grey	GE Grey	3	2	2 Black	3 110V	GR Green	
D (ON)-OFF		T2	RE Red	RE Red	4	3	3 Red	4 220V	BL Blue	
E ON-(OFF)		T2	GR Green	GR Green	4	4	4 Blue		OR Amber	
F ON-(ON)		T2	BL Blue	BL Blue	4	5	5 Yellow			
M ON-OFF-(ON)		Q	OR Amber	OR Amber		6				
X (ON)-OFF-(ON)		Q	YE Yellow	YE Yellow		7				
N ON-OFF w/lamp (Unswitched neutral)		P				8				
		S				9				
						A				
						D				
						H				

SLIDE SWITCH




INDICATOR LAMP

AC SOCKET

*For this option, please call factory for details

SUGGESTED PANEL HOLE SIZE

Panel thickness	x
0.75 ~ 1.25	28.3
1.25 ~ 2.0	28.5
2.0 ~ 3.0	28.7

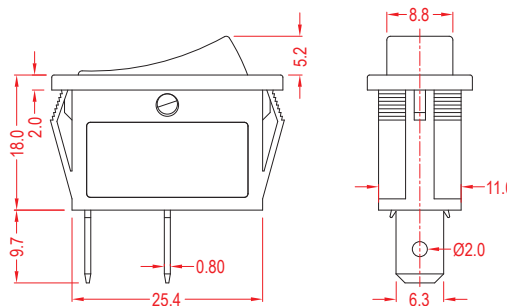

KEYBOARD SWITCH

TIMER SWITCH

POWER TOOL SWITCH