



SR-38 Series

ROCKER SWITCH



SR-38A



SR-38B



SR-38C



SR-38M



SR-38N



SR-38 Cap

Specifications:


10(3)A 250VAC T125/55 5E4
16(4)A 250VAC T125/55
★10(8)A 250VAC T125/55



10.1A 250VAC T125
16A 125VAC




E199326

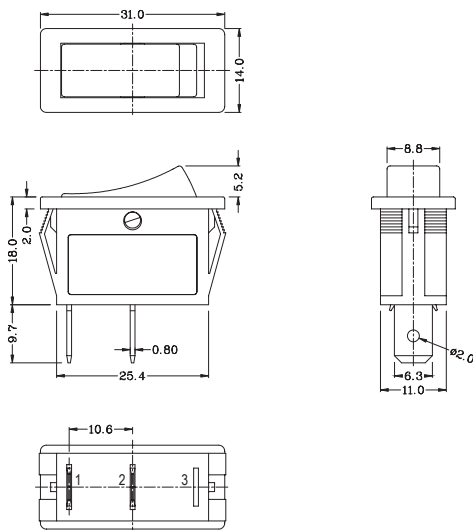

Suggested panel hole size

Panel thickness	X
0.75~1.25	28.3
1.25~2.0	28.5
2.0~3.0	28.7



SR-38

A L T BK BK 4 0 0 0 00													
Function	Current	Terminal Type	Base Color	Button Color	Button Type	Printing	Color of Printing	Lamp Voltage	Small Lens Color	Internal Use Only			
A ON-OFF	L 16(4)A 250VAC	T	BK Black	BK Black	2	0 None	0 None	0 None	00 None				
B ON-ON	10(3)A 250VAC 5E4		WT White	WT White	(For N function only)	1	1 White	1 12V	RE Red				
C ON-OFF-ON	16A 125VAC	T1	GE Grey	GE Grey	3	2	2 Black	3 110V	GR Green				
D (ON)-OFF			RE Red	RE Red	(For C,M,X functions only)	3	3 Red	4 220V	BL Blue				
E ON-(OFF)		T2	GR Green	GR Green	4	4	4 Blue		OR Amber				
F ON-(ON)			BL Blue	BL Blue	(For A,B,D,E,F functions only)	5	5 Yellow						
M ON-OFF-(ON)		Q	OR Amber	OR Amber	6	6							
X (ON)-OFF-(ON)			YE Yellow	YE Yellow	7	7							
N ON-OFF w/lamp (Unswitched neutral)		P			8	8							
					9	9							
		S			A	A							
					D	D							
					H	H							

*For this option, please call factory for details