

SM-33

MICRO SWITCH SM-33 SERIES



SM-33D



SM-33F



SM-33F



SM-33F

SPECIFICATIONS



IP55 waterproof protection for housing type no.W1(KEMA,ENEC approved)
IP67 waterproof protection for housing type no.W2(KEMA,ENEC approved)

3(1)A	250VAC	T85	
3(3)A	250VAC	T85	5E4
8(2)A	250VAC	25T85	
8(2)A	250VAC	40T105	
3A	250VAC	T105	
6A	125VAC		
6A	250VAC	T105	
12A	125VAC		
8A	250VAC	T105	
15A	125VAC		
1/3HP	250VAC	T105	
1/6HP	125VAC		



E199326

RECOGNIZED COMPONENT

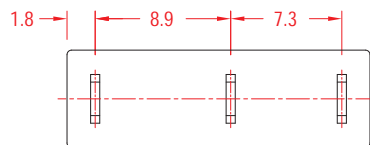
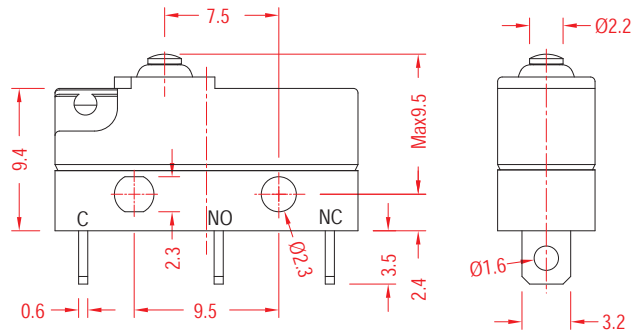
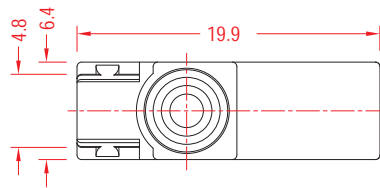


Conforms to UL STD.61058-1.
Certified To CSA STD.C22.2
No. 61058-1.




















3A GP	250VAC		
6A GP	125VAC	T85	
6A GP	250VAC		
8A GP	250VAC		
12A GP	125VAC	T85	
15A GP	125VAC	T85	
3(1)A	250VAC	T85	
3(3)A	250VAC	T85	5E4
8(2)A	250VAC	40T105	
8(2)A	250VAC	25T85	

FEATURES

- Usage: Food processor, Hair care, Cleaning Robot, Coffee machine
用途：食品處理器、美髮產品、清潔機器人、咖啡機
- Operating force option
操作力選項
- With lever & special button option
訊號及主開關應用
- Signal and Power switch
帶槓桿和特殊按鈕選項
- Waterproof IP55/ IP67 design option
防水 IP55/ IP67 設計選項
- Wire terminal design option
接線端子設計選項
- Temperature Rating: -40°C~105°C
額定溫度：-40°C~105°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0



ORDER INFORMATION

D	S	1	1	BK	S	1
FUNCTION	CURRENT	OPERATING FORCE OPTIONS	HOUSING TYPE	HOUSING COLOR	TERMINAL TYPE	LEVER / KNOB TYPE
D (ON)-OFF	S 3(1)A 250VAC	1 60g.f	1  Standard	BK Black	S 	1 
E ON-(OFF)	6A 125VAC	2 100g.f				3 
F ON-(ON)	M 8(2)A 250VAC	3 150g.f	W1  Waterproof		P2 	4 
		4 200g.f			P3 	7 
	L 8(2)A 250VAC		W2  Waterproof		H 	9 
	3(3)A 250VAC 5E4				P 	10 
	15A 125VAC				P1 	14 
	1/3HP 250VAC					B  (For W2 housing only)
1/6HP 125VAC					C  (For W2 housing only)	
					D  (For W2 housing only)	

* 60g.f not apply to L Rating
* Operating force measured at the knob

ROCKER SWITCH

ROTARY SWITCH

PUSH SWITCH

MICRO SWITCH

SLIDE SWITCH

INDICATOR LAMP

AC SOCKET

KEYBOARD SWITCH

TIMER SWITCH

POWER SWITCH