


MC01

MICRO SWITCH MC01 SERIES

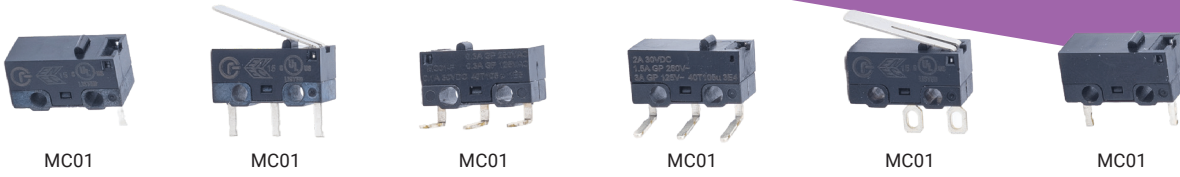

ROCKER SWITCH

ROTARY SWITCH

PUSH SWITCH

MICRO SWITCH

SLIDE SWITCH

INDICATOR LAMP

AC SOCKET

KEYBOARD SWITCH

TIMER SWITCH

POWER SWITCH

SPECIFICATIONS



0.1A	30VDC	40T105 μ	1E5
0.3A GP	125VAC	40T105 μ	1E5
2.0A	30VDC	40T105 μ	3E4
1.5A GP	250VAC	40T105 μ	3E4
3.0A GP	125VAC	40T105 μ	3E4




FEATURES

- Usage: Computer Mouse, Coffee machine, Signal processing device, Electric Blanket
用途：電腦鼠標、咖啡機、信號處理設備、電熱毯
- Extreme small size
極小尺寸
- Low rating usage
低電流使用
- With lever option
帶槓桿選項
- Temperature Rating: -40°C~105°C
額定溫度：-40°C~105°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0


ORDER INFORMATION

D	S	1	0	1	P	INTERNAL USE ONLY
FUNCTION	CURRENT	BASE	LEVER	OPERATION FORCE	TERMINAL	
D (ON-OFF)	S 0.1A 30VDC 40T105 μ 1E5	1	0	1 75g.fMAX Without Tooling	P	
E ON-(OFF)	0.3A GP 125VAC		1 14.0(REF)	2 150g.fMAX	P1	
F (ON)-ON	*M 2.0A 30VDC 40T105 μ 3E4 1.5A GP 250VAC 3.0A GP 125VAC		2 Without Tooling 3 Without Tooling		P2	
					S	

*M current only for operation force 150g.f max.

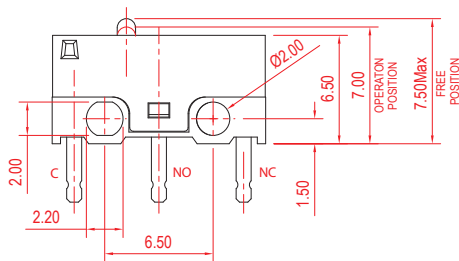

MOUNTING HOLE

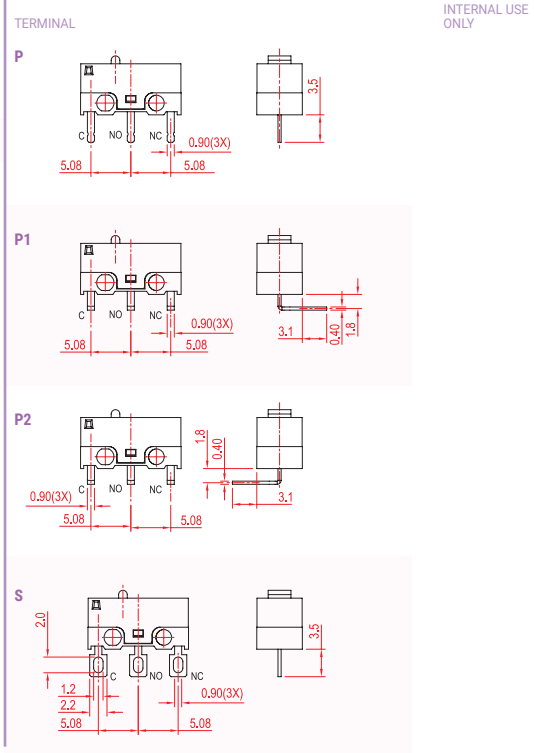

CIRCUIT DIAGRAM

