



SM-52 Series



SM-52F

Specifications:

5(1)A	250VAC	40T125	5E4
8(3)A	250VAC	T125	1E4
5(1)A	250VAC	T125	1E5
0.1A	30VDC	40T125	1E5




5(1)A	125/250VAC	40T125	5E4
8(3)A	125/250VAC	T125	1E4
10A GP	125VAC	T125	6E3 1E4
5(1)A	125/250VAC	T125	1E5
0.1A	30VDC	40T125	1E5

125/250VAC	40T125	5E4
125/250VAC	T125	1E4
125VAC	T125	6E3 1E4
125/250VAC	T125	1E5
30VDC	40T125	1E5



(UL61058 approved)

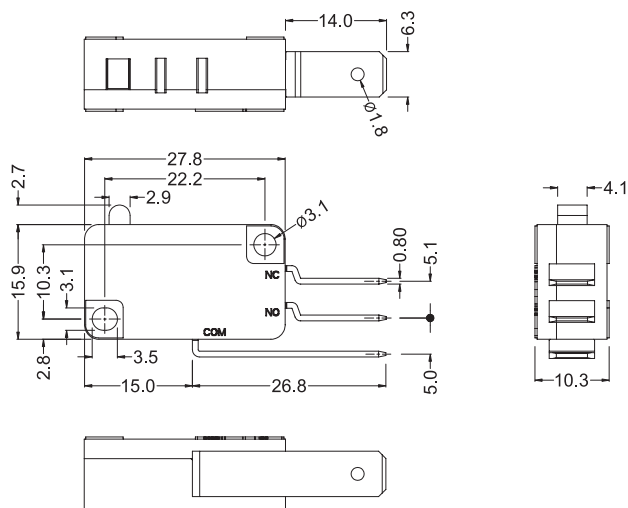

SM-52

F	L	1	BK	T2	N	0	
Function	Current	*Operating Force Options	Base Color	Terminal Type	Lever Position	Lever / Knob Type	Internal Use Only
D (ON-OFF)	L 5(1)A 125/250VAC 5E4	1 Max.15g.f	BK Black	T2	N No Lever	N	
E ON-(OFF)	5(1)A 125/250VAC 1E5	2 Max.45g.f			S Standard ratio	1 28.0	
F ON-(ON)	0.1A 30VDC 1E5				H High ratio	2 32.7	
	8(3)A 125/250VAC					3 23.7	
	10A GP 125VAC					4 14.0	
						5 22.0	
						6 18.0	

*Operating force measured at the knob.