

SL-303

SLIDE SWITCH SL-303 SERIES



SL-303-001

SPECIFICATIONS


	6(2)A	250VAC	T85	5E4
	10(3)A	250VAC	T85	
 E199326	6.5A	250VAC	T105	
	13A	125VAC		
	7.5A	250VAC	T105	
 Conforms to UL STD. 61058-1. Certified To CSA STD. C22.2 No. 61058-1.	15A	125VAC		
	6(2)A	250VAC	T85	5E4
	10(3)A	250VAC	T85	
	7.5A GP	250VAC	T85	
	15A GP	125VAC	T85	

FEATURES

- Usage: Haircare product
用途：美髮產品
- 3 terminals output, max control 3 circuits
3端子輸出·最多控制3個電路
- 4 positions with different circuit design option
4個檔位·具有不同的電路設計選項
- Temperature Rating: -10°C~105°C
額定溫度：-10°C~105°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0

ORDER INFORMATION

001	L	1	S	INTERNAL USE ONLY
CIRCUIT	CURRENT	BUTTON TYPE	TERMINAL TYPE	
001	L10(3)A 250VAC	1	S	
003	6(2)A 250VAC 5E4			
005	15A GP 125VAC			
012				
015				
017				
023				
029				
MORE				

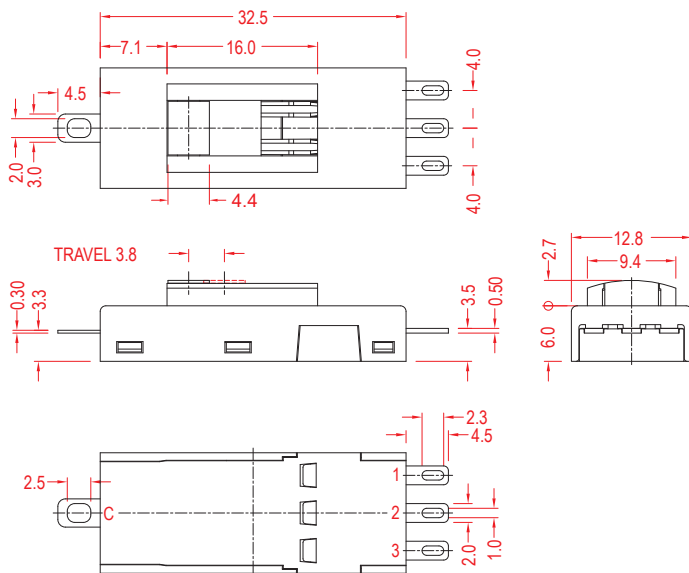

CIRCUIT OPTIONS


*CIRCUIT:001				*CIRCUIT:003				*CIRCUIT:005			
POSITION	ELECTRIC CIRCUIT			POSITION	ELECTRIC CIRCUIT			POSITION	ELECTRIC CIRCUIT		
	C-1	C-2	C-3		C-1	C-2	C-3		C-1	C-2	C-3
1				1				1			
2	•			2		•		2		•	
3				3	•			3	•		
4				4	•	•		4	•	•	

*CIRCUIT:012				*CIRCUIT:015				*CIRCUIT:023			
POSITION	ELECTRIC CIRCUIT			POSITION	ELECTRIC CIRCUIT			POSITION	ELECTRIC CIRCUIT		
	C-1	C-2	C-3		C-1	C-2	C-3		C-1	C-2	C-3
1				1				1			
2	•			2		•		2		•	
3				3	•			3	•		
4				4	•	•		4	•	•	

*CIRCUIT:029			
POSITION	ELECTRIC CIRCUIT		
	C-1	C-2	C-3
1			
2			•
3	•		
4	•	•	

*with production mould
For more circuit options, please call factory

CIRCUIT DIAGRAM



ROCKER SWITCH

ROTARY SWITCH

PUSH SWITCH

MICRO SWITCH

INDICATOR LAMP

AC SOCKET

KEYBOARD SWITCH

TIMER SWITCH

POWER TOOL SWITCH