



SM-51 Series




SM-51F



SM-51D




SM-51F



SM-51D



SM-51E



SM-51F

Specifications:


16(4)A 250VAC T125
 15A 250VAC T125
 (≥3mm contact gap available on request)



10.1A	250VAC	T125
16A	125VAC	T125
10.1A	250VAC	T125
20A	125VAC	T125
1/4 HP	125/250VAC	T125
3/4 HP	125/250VAC	T125
1/2 HP	125/250VAC	T125



*UL61058 approved

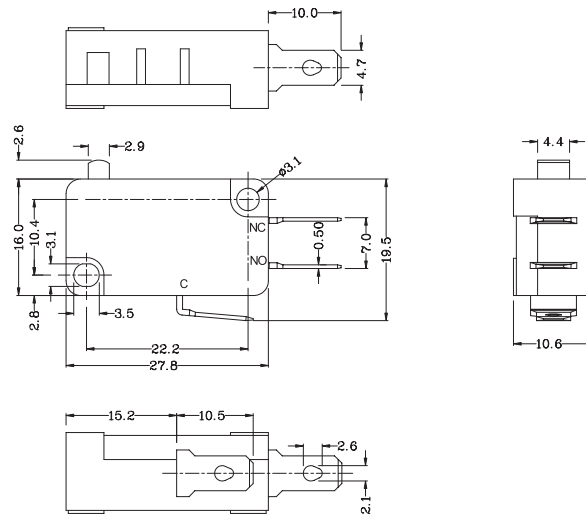

MICRO SWITCH

SM-51

Function	Current	Base Color	Terminal Type	Lever position	Lever / Knob Type	Internal Use Only
D (ON-OFF)	H 16(4)A 250VAC	BK Black	Q, T1	N No Lever	0	
E ON-(OFF)	16A 125VAC		Q1, S1	S Standard ratio	A, C	
F ON-(ON)	L 16(4)A 250VAC 20A 125VAC		Q2, S2, T	H High ratio	1, 2, 3, 4, 5, 6	

*Operating force measured at the knob.

*For more lever options, please see next page.