

SM-52

MICRO SWITCH SM-52 SERIES

ROCKER SWITCH



SM-52F

SM-52F

ROTARY SWITCH



UL 61058-1 standard approved

PUSH SWITCH



SPECIFICATIONS

5(1)A 125/250VAC 40T125 5E4

8(3)A 125/250VAC T125 1E4

10A GP 125VAC T125 6E3 1E4

5(1)A 125/250VAC T125 1E5

0.1A 30VDC 40T125 1E5

5(1)A 250VAC 40T125 5E4

8(3)A 250VAC T125 1E4

5(1)A 250VAC T105 1E5

0.1A 30VDC 40T125 1E5

FEATURES

- Usage: Vacuum Cleaner, Hair care, Washing machine, Coffee machine
用途：吸塵器、美髮產品、洗衣機、咖啡機
- Very Light operating force 15g
非常輕操作力 15g
- With lever & special button option
帶槓桿和特殊按鈕選項
- Horizontal terminal
橫向端子
- Temperature Rating: -10°C~125°C
額定溫度：-10°C~125°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0

ORDER INFORMATION

D	L	1	BK	T2	N	N	INTERNAL USE ONLY
FUNCTION	CURRENT	*OPERATING FORCE OPTIONS	BASE COLOR	TERMINAL TYPE	LEVER POSITION	LEVER/KNOB TYPE	
D (ON)-OFF	L 5(1)A 125/250VAC 5E4	1 Max.15g.f	BK Black	T2	N	N	
E ON-(OFF)	5(1)A 125/250VAC 1E5	2 Max.45g.f			S	1	
F ON-(ON)	0.1A 30VDC 1E5				H	2	
	8(3)A 125/250VAC					3	
	10A GP 125VAC					4	
						5	
						6	

SLIDE SWITCH


INDICATOR LAMP

AC SOCKET

KEYBOARD SWITCH

TIMER SWITCH

POWER SWITCH

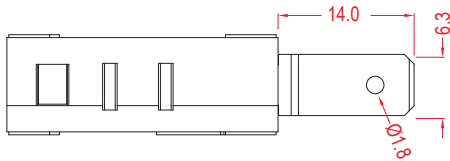

*Operating force measured at the knob

