



TM01-S



TM01-S

SPECIFICATIONS



11(4)A	125/250VAC	T100	25E3
14(4)A	125/250VAC	T100	
15A GP	125VAC	T100	

FEATURES

- Usage: Coffee machine with ECO requirement
用途：有ECO要求的咖啡機
- Indicator lamp optional
指示燈可選
- Predefined time setting / Remote signal setting
預定時間設置/遠程信號設置
- Temperature Rating: 0°C~100°C
額定溫度：0°C~100°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0






ORDER INFORMATION

Tx	L	1	BK	1	GE	BL	Q	INTERNAL USE ONLY
FUNCTION	CURRENT	BUTTON TYPE	BASE COLOR	BUTTON TYPE	BASE COLOR	LENS COLOR	TERMINAL	
Tx ON-OFF W/timer	L 11(4)A 125VAC 14(4)A 125VAC	1	BK BLACK	1	GE GREY BL BLUE GR GREEN BK BLACK RE RED WT WHITE YE YELLOW	BL BLUE GR GREEN RE RED YE YELLOW	Q	
S ON-OFF By Signal	15A GP 125VAC H 11(4)A 250VAC 14(4)A 250VAC	2						
		FOR T FUNCTION						
		FOR S FUNCTION						

DESCRIPTION

FUNCTION OPTIONS (Nine typical timing)	
Item(Tx)	Timing
T1	-
T2	15Minutes Auto OFF
T3	30Minutes Auto OFF
T4	45Minutes Auto OFF
T5	1Hour Auto OFF
T6	2Hours Auto OFF
T7	4Hours Auto OFF
T8	12Hours Auto OFF
T9	24Hours Auto OFF
TB	40Minutes Auto OFF
TD	3Minutes Auto OFF

CIRCUIT DIAGRAM

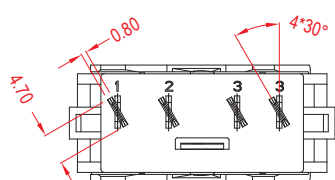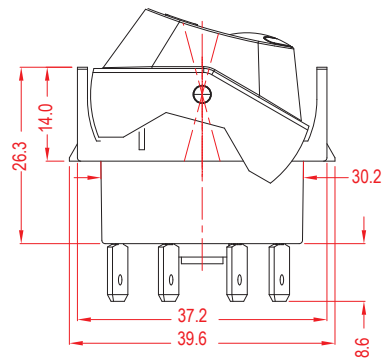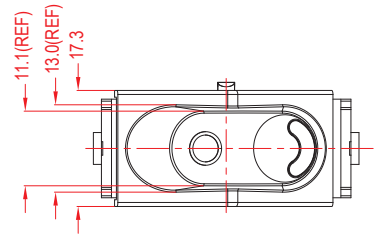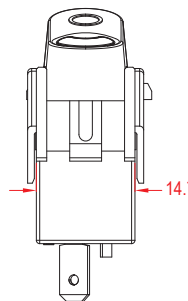

*Other more functions are available upon request.