



SB-25A



SB-25A

Specifications:




6(3)A 250VAC 25T105 5E4
8(3)A 250VAC 25T105




4A 250VAC T105
8A 125VAC
TV5




PUSH SWITCH

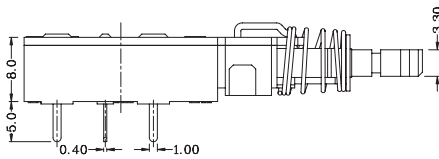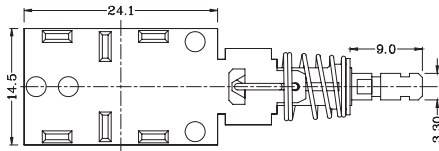

Travel	
A. Free Position	25.5mm±0.5
B. Operating Position	22.3mm±0.5



WIRING DIAGRAM

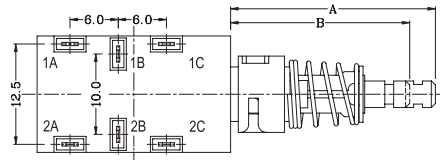

SB-25

Function	No. of Poles	Current	Base Color	Knob Color	Base Type	Knob Type	Terminal Type	Internal Use Only
A ON-OFF	1 Single	L 8(3)A 250VAC	BK Black	BK Black	1	1	P	
B ON-ON	2 Double	6(3)A 250VAC 5E4			2		S	
D (ON)-OFF					3		S1	
E ON-(OFF)								
F ON-(ON)								