


SR-96

ROCKER SWITCH SR-96 SERIES

ROCKER SWITCH

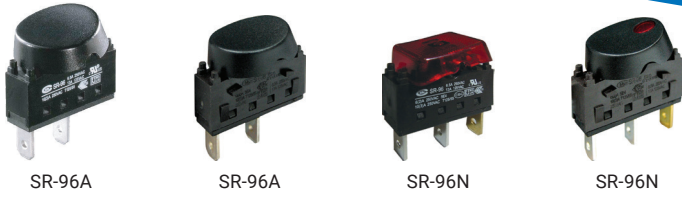

PUSH SWITCH

PUSH SWITCH

MICRO SWITCH

SLIDE SWITCH

INDICATOR LAMP

AC SOCKET

KEYBOARD SWITCH

TIMER SWITCH

POWER TOOL SWITCH


SPECIFICATIONS

	6(2)A	250VAC	T125/55	5E4
	10(3)A	250VAC	T125/55	
	6.5A	250VAC	T105	
	13A	125VAC		
	7.5A	250VAC	T105	
	15A	125VAC		
	16A GP	125VAC	T85	
	6(2)A	125/250VAC	T125/55	5E4
	10(3)A	125/250VAC	T125/55	

ORDER INFORMATION

A	L	Q	1	BK	BK	4	0	0	00	0	
FUNCTION	CURRENT	TERMINAL TYPE	BASE TYPE	BASE COLOR	BUTTON COLOR	BUTTON TYPE	PRINTING	COLOR OF PRINTING	SMALL LEN COLOR	LAMP VOLTAGE	INTERNAL USE ONLY
A ON-OFF	L 10(3)A 250VAC	Q	1	BK Black	BK Black	4	0 NONE	0 None	00 None	0 None	
D (ON)-OFF	6(2)A 250VAC 5E4	S	2	WT White	WT White	5	1	1 White	RE Red	3 110V	
N ON-OFF w/lamp (Unswitched neutral)	15A 125VAC	Q1		GE Grey	GE Grey	6	2	2 Black	GR Green	4 220V	
R (ON)-OFF w/Lamp		Q2		RE Red	RE Red	8	3	3 Red	BL Blue		
		Q3		GR Green	GR Green	12	8	4 Blue	OR Amber		
		A		BL Blue	BL Blue	13	9	5 Yellow			
		B		OR Amber	OR Amber	R	A				
				YE Yellow	YE Yellow						

SUGGESTED PANEL HOLE SIZE

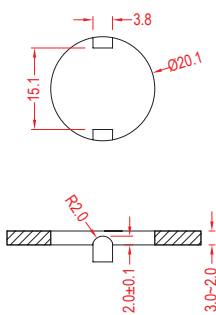

FEATURES

- Usage: Coffee machine
用途：咖啡機
- Single Pole
單極
- Round Button/With Indicator lamp option
指示燈功能
- Temperature Rating: -10°C~125°C
額定溫度：-10°C~125°C
- Flammability Rating: UL94V-2 / Optional UL94V-0
可燃性等級：UL94V-2 / 可選 UL94V-0

